



নগাঁও বিশ্ববিদ্যালয়

NAGAON UNIVERSITY

A public State University established by upgrading Nowgong College (Autonomous)
under ASSAM ACT NO. LIX of 2023
Old A.T. Road, Nagaon - 782001
Nagaon : Assam

Nabaprasad Nath, M.A. Ph.D, B. Ed.
Registrar (i/c)

☎ 76359 10592
03672 291233

Ref. No-NU/ESTB/QN/2026/611

Date: 10/07/2026

QUOTATION NOTICE

Sealed quotations affixing a non-refundable Court Fee Stamp of ₹8.25 (Rupees Eight and Twenty-Five Paise only) are hereby invited from reputed manufacturers, authorized dealers, or authorized suppliers for the Supply, Installation, Testing and Commissioning of Modular Laboratory Furniture and Fume Hood at Nagaon University, Nagaon, Assam.

Interested bidders may obtain the detailed specifications and terms & conditions from the Office of the undersigned during office hours on all working days or from the University website www.nagaonuniversity.ac.in.

The quotation should be submitted in a sealed envelope superscribed "Quotation for Supply, Installation, Testing and Commissioning of Modular Laboratory Furniture and Fume Hood at Nagaon University" and addressed to the undersigned on or before 18/07/2026 up to 4:30 PM.

Terms & Conditions

1. The bidder shall be a reputed manufacturer or an authorized dealer/supplier and shall submit valid documentary proof of authorization.
2. The quoted rates shall be inclusive of all taxes, packing, forwarding, transportation, loading, unloading, installation, testing, commissioning, and any other incidental charges.
3. The bidder shall clearly mention the make, model, specifications, warranty period, and delivery schedule.
4. The supplied items shall conform strictly to the specifications prescribed by the University.
5. The successful bidder shall complete the supply, installation, testing, and commissioning within the stipulated period mentioned in the supply order.
6. The bidder shall submit a valid Work Experience Certificate in support of having successfully executed similar supply, installation, testing, and commissioning works for Government Departments, Government Organizations, Autonomous Bodies, Universities, or other reputed institutions.
7. Payment shall be made after successful installation, commissioning, and certification by the competent authority of the University, subject to availability of funds.
8. The University reserves the right to accept or reject any or all quotations, wholly or partly, without assigning any reason thereof.

(Dr. Nabaprasad Nath)

Memo. No: - NU/ESTB/QN/2026/611-A

Date: 10/07/2026

Copy to: -

1. P.S. i/c to Vice Chancellor.
2. P.A. i/c to Registrar i/c.
3. Finance Officer i/c.
4. Head Assistant i/c.
5. Accountant.
6. Dealing Assistant.

(Dr. Nabaprasad Nath)

TOTAL ESTIMATED COST= 11,27,702.00 (Eleven Lakh twenty Seven Thousand seven hundred two) only

NAGAON UNIVERSITY

Sr.No.	Description	Qty.	Unit	Rate (Including GST)	Remarks
Department Of Physics					
physics lab - 1					
1	ISLAND Bench (IB - 2&3) Size: L 5300 mm x W 1200 mm x H 900 mm	2.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	6.36	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	8.00	Nos.		
	- Leg space	6.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	10.45	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	28.00	Nos.		
	- Data Socket	4.00	Nos.		
	- Service Pendant	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
2	Wall Mounted Storage Cabinet Size: L 750 mm x W 400 mm x H 600 mm	5.00	Nos.		
	- Wall mounted cabinets in G.I. construction with epoxy powder coated				
	one no. adjustable self with double skin Glass doors and Locks				
physics lab - 2					
3	ISLAND Bench (IB - 4) Size: L 5300 mm x W 1200 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	6.36	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	8.00	Nos.		
	- Leg space	6.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	10.45	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	28.00	Nos.		
	- Data Socket	4.00	Nos.		
	- Service Pendant	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
4	Wall Mounted Storage Cabinet Size: L 750 mm x W 400 mm x H 600 mm	5.00	Nos.		
	- Wall mounted cabinets in G.I. construction with epoxy powder coated				
	one no. adjustable self with double skin Glass doors and Locks				

Pallab Jyoti Acharya
Tech member


Registrar (i/c)
Nagaon University
Nagaon, Assam
Registrar i/c
Nagaon University
Nagaon (Assam)
Pin- 782001

TOTAL ESTIMATED COST= 9,18,241.00 (Nine lakh eighteen thousand two hundred forty one) only

NAGAON UNIVERSITY

Sr.No.	Description	Qty.	Unit	Rate (Including GST)	Remarks
Department of medical laboratory technology					
1	Wall Bench (WB - 15) Size: L 2475 mm x W 750 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	1.86	Sqm.		
	- 500 mm wide storage module with one drawer one shutter	1.00	Nos.		
	- 750 mm wide storage module with two shutters	1.00	Nos.		
	- Leg space	2.00	Nos.		
	- Vertical support for leg space	1.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	1.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	1.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	1.00	Nos.		
	- Worktop mounted, double outlet eye wash with SS braided flexible hos	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
2	Corner Bench (CB - 10) Size: L 1180 mm x W 1180 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	1.39	Sqm.		
	- Corner storage module with one shutter	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.36	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	4.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
3	Wall Bench (WB - 16) Size: L 5066 mm x W 750 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	3.80	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	3.00	Nos.		
	- 500 mm wide storage module with one drawer one shutter	1.00	Nos.		
	- Leg space	3.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	5.07	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	14.00	Nos.		
	- Data Socket	3.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
4	Wall Mounted Storage Cabinet Size: L 750 mm x W 400 mm x H 600 mm	10.00	Nos.		
	- Wall mounted cabinets in G.I. construction with epoxy powder coated one no. adjustable self with double skin Glass doors and Locks				
5	ISLAND Bench (IB - 5) Size: L 3600 mm x W 1500 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	5.40	Sqm.		
	- 750 mm wide storage module with two shutters	6.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	6.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	6.00	Nos.		
	- Leg space	4.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	3.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
6	Wall Bench (WB - 17) Size: L 5300 mm x W 750 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	3.98	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	4.00	Nos.		
	- Leg space	3.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	5.30	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	14.00	Nos.		
	- Data Socket	3.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
7	Wall Bench (WB - 18) Size: L 8534 mm x W 750 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	6.40	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	5.00	Nos.		
	- 750 mm wide storage module with two shutters	3.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	3.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	3.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	3.00	Nos.		
	- Worktop mounted, double outlet eye wash with SS braided flexible hos	1.00	Nos.		
	- Leg space	3.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	8.53	Rmt.		

Pallab Chandra Mahanta
Technical Member

[Signature] Registrar /c
Nagaon University
Nagaon (Assam)
Pin-782001

- 6/16 Amp electrical sockets and 16 Amp one way switch	16.00	Nos.		
- Data Socket	3.00	Nos.		
- Close Panel in G.I. Construction	1.00	Nos.		
- Filler Panel in G.I. Construction	2.00	Nos.		
8 Wall Mounted Storage Cabinet Size: L 750 mm x W 400 mm x H 600	10.00	Nos.		
- Wall mounted cabinets in G.I. construction with epoxy powder coated				
one no. adjustable self with double skin Glass doors and Locks				

*Pallab Jyoti Kalita
Tech Member*


Registrar (i/c)
Nagaon University
Nagaon, Assam
Registrar V/c
Nagaon University
Nagaon (Assam)
Pin- 782001

TOTAL ESTIMATED COST= 21,43,140.00 (Twenty one lakh forty three thousand one hundred forty) only

NAGAON UNIVERSITY


Sr. No.	Description	Qty.	Unit	Rate (including GST)	Remarks
Department Of Chemistry					
Wet Lab					
1	Wall Bench (WB - 1) Size: L 3490 mm x W 750 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	2.62	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	2.00	Nos.		
	- 750 mm wide storage module with two shutters	1.00	Nos.		
	- 350 mm wide storage module with one drawer one shutter	1.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	1.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	1.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	1.00	Nos.		
	- Leg space	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.74	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	6.00	Nos.		
	- Close Panel in G.I. Construction	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
	Corner Bench (CB - 1) Size: L 1030 mm x W 1030 mm x H 900 mm	1.00	Nos.		
2	- Work top in 18 ± 1 mm thick Black Granite construction	1.06	Sqm.		
	- Corner storage module with one shutter	1.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	1.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	1.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
	Wall Bench (WB - 2) Size: L 3891 mm x W 750 mm x H 900 mm	1.00	Nos.		
3	- Work top in 18 ± 1 mm thick Black Granite construction	2.92	Sqm.		
	- 750 mm wide storage module with two shutters	1.00	Nos.		
	- 500 mm wide storage module with one drawer one shutter	3.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	1.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	1.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	1.00	Nos.		
	- Worktop mounted, double outlet eye wash with SS braided flexible hose	1.00	Nos.		
	- Leg space	2.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	3.14	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	10.00	Nos.		
	- Close Panel in G.I. Construction	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
4	ISLAND Bench (IB - 1) Size: L 2800 mm x W 1500 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	4.20	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	4.00	Nos.		
	- 750 mm wide storage module with two shutters	1.00	Nos.		
	- 500 mm wide storage module with one drawer one shutter	2.00	Nos.		
	- 350 mm wide storage module with one drawer one shutter	2.00	Nos.		
	- Granite Skirting 100 mm Height	1.00	Nos.		
	- Single piece molded PP sink (L 600 x W 450 x D 315)	1.00	Nos.		
	- Worktop mounted three way water tap with swan neck spout	1.00	Nos.		
	- PP Adjustable Pegboard with 46 nos. PP Pegs. (Size: 600 x 600 mm)	1.00	Nos.		
	- Worktop mounted, double outlet eye wash with SS braided flexible hose	1.00	Nos.		
	- Double sided double tier reagent rack with electrical raceway	1.90	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	8.00	Nos.		
	- Data Socket	4.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Service Pendant	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
5	Wall Mounted Storage Cabinet Size: L 750 mm x W 400 mm x H 600 mm	18.00	Nos.		
	- Wall mounted cabinets in G.I. construction with epoxy powder coated one no. adjustable self with double skin Glass doors and Locks				
6	Chemical Storage Cabinet (CSC) Size: L 1000 x D 450 x H 1830mm	1.00	Nos.		
	- Outer body in GI epoxy powder coated construction				
	- Inner Skin / Baffles in 5mm Thk. PP construction sheet on shelves.				
	- Special arrangement for ventilation from each shelf,				
	- Double skin metallic doors with Lock, Butt Hinges, Positive Catche and SS handles				
7	- 100mm dia. Duct damper in PP construction				
	Spot Extractor	2.00	Nos.		
	Premier make spot extractor in PP construction with 385mm dia dome with aluminium ceiling bracket (up to 1200mm length. Additional charges will be applicable above this height) with necessary provision to connect exhaust duct.				

8	Low Constant Volume (LCV) type Bench Fume Hood (Size: L 1500 x D 915 x H 2300 mm) (For AC Lab)	1.00	Nos.		
	Consisting of following : (As specified in Annexure - III)				
	Fume Hood Superstructure				
	Fume Hood Worktop				
	Service Valves				
	Electrical Fittings				
	Controls				
	Fume Hood Understructure				
	Fume Hood Under-Cabinet (Chemical Storage Purpose)				
	Accessories				
9	Exhaust Fan - One fan for 1 Nos. 1500 mm wide fume hood , 2 Nos. Spot Extractor & 1 Nos. Chemical Storage Cabinet	1.00	Nos.		
	- Single piece molded UV treated chemical resistant SISW direct driven centrifugal fan in PP construction with suitable stand in MS powder coated construction, CFM 900 To 1000				
	- Corrosive resistant PP Impeller with extra strength,high efficiency, properties which produces lower noise and power consumption.				
	- Drive - 2 HP, 1400 RPM, 415V, 50Hz., TEFC Class B insulation induction motor with IP55 enclosure, in Non- FLP const.				
	- 16A, 3Ph MCB for Fan - Legrand or eq. Make				
	- DOL Starter for Motor				
	Emergency Safety Shower	1.00	Nos.		
	Floor standing, overhead emergency shower with eyewash unit, main frame in S.S fabrication				
Dry Lab					
11	Wall Bench (WB - 3) Size: L 2525 mm x W 900 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	2.27	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	1.00	Nos.		
	- 500 mm wide storage module with one drawer one shutter	2.00	Nos.		
	- Leg space	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.53	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	6.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
	Corner Bench (CB - 2 & 3) Size: L 1180 mm x W 1180 mm x H 900 mm	2.00	Nos.		
12	- Work top in 18 ± 1 mm thick Black Granite construction	1.39	Sqm.		
	- Corner storage module with one shutter	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.36	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	4.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
	Wall Bench (WB - 4) Size: L 2230 mm x W 900 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	2.01	Sqm.		
13	- 750 mm wide storage module with one drawer two shutters	1.00	Nos.		
	- 600 mm wide storage module with one drawer two shutter	1.00	Nos.		
	- Leg space	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.23	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	6.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Close Panel in G.I. Construction	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
14	Wall Bench (WB - 5) Size: L 3675 mm x W 900 mm x H 900 mm	1.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	3.31	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	3.00	Nos.		
	- Leg space	2.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	3.68	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	10.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
15	Wall Bench (WB - 6&7) Size: L 2300 mm x W 750 mm x H 900 mm	2.00	Nos.		
	- Work top in 18 ± 1 mm thick Black Granite construction	1.73	Sqm.		
	- 750 mm wide storage module with one drawer two shutters	2.00	Nos.		
	- Leg space	1.00	Nos.		
	- Worktop mounted electrical raceway in GI powder coated construction	2.30	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	6.00	Nos.		
	- Back Panel in G.I. Construction	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
	ISLAND Bench (IB - 2) Size: L 2280 mm x W 1500 mm x H 900 mm	1.00	Nos.		

16	- Work top in 18 ± 1 mm thick Black Granite construction	3.42	Sqm.		
	- 500 mm wide storage module with one drawer one shutter	4.00	Nos.		
	- Leg space	4.00	Nos.		
	- Vertical support for leg space	2.00	Nos.		
	- Double sided double tier reagent rack with electrical raceway	2.13	Rmt.		
	- 6/16 Amp electrical sockets and 16 Amp one way switch	16.00	Nos.		
	- Data Socket	4.00	Nos.		
	- MS 25 X 25 X 1.2 mm Sq. Pipe for Granite Support	2.00	Nos.		
	- Service Pendant	1.00	Nos.		
	- Filler Panel in G.I. Construction	2.00	Nos.		
17	Exhaust ducting in PP + FRP (Round Shape) construction (3mm + 2mm) complete with necessary bends, reducers, T-connections, supports, flanges, gaskets, nutbolts etc. Note: 1) Amount for ducting work shall be payable as per actual measurment 2) If the ducting is less than 30 sq. mt., then Additional Installation charges will be applicable @ Rs. 25,000/-	40.00	Sq. Mtr.		

*Pallab Chandra Neelgiri
Tech-Member*

Registrar (i/c)
Nagaon University
Nagaon, Assam
Nagaon University
Nagaon (Assam)
Pin- 782001

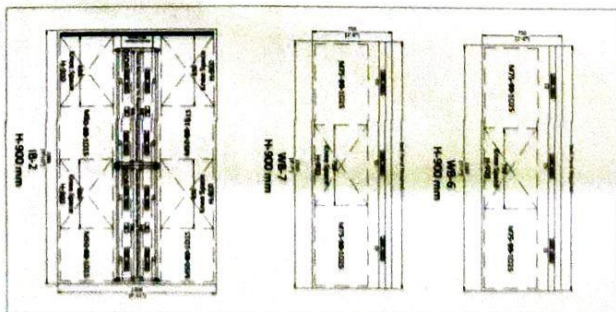

Yellowish white.
Tub. - none.

Citizen Industries
Citizen

Offices: Akron, OH • Dallas, TX • Detroit, MI • Evansville, IN • Grand Rapids, MI • Indianapolis, IN • Kansas City, MO • Los Angeles, CA • Miami, FL • Milwaukee, WI • Minneapolis, MN • New York, NY • Philadelphia, PA • St. Louis, MO • Toledo, OH • Wichita, KS

Phone: 800-4-A-CITIZEN • 760-255-1000 • www.citizenindustries.com

NAME	DESCRIPTION		
DATE	REVISED LAYOUT OF LABORATORY WORKSTATIONS		
COLOR	IN PLINTH MOUNTED DESIGN & FLOOR HOODS		
APP.			
	Client: <u>Nagpur University - Aaram</u>		
DWG NO. 20113	SCALE:	N.T.S.	REV NO.
CARE: 20.04.2020	SHEET NO.	01 OF 02	12


6096
[20']

WB-16
H-900 mm

WB-15
H-900 mm

IB-05
H-900 mm

Wall Mounted storage cabinet
(L750 x D400 x H600mm)
10 Nos.
Location to be decided

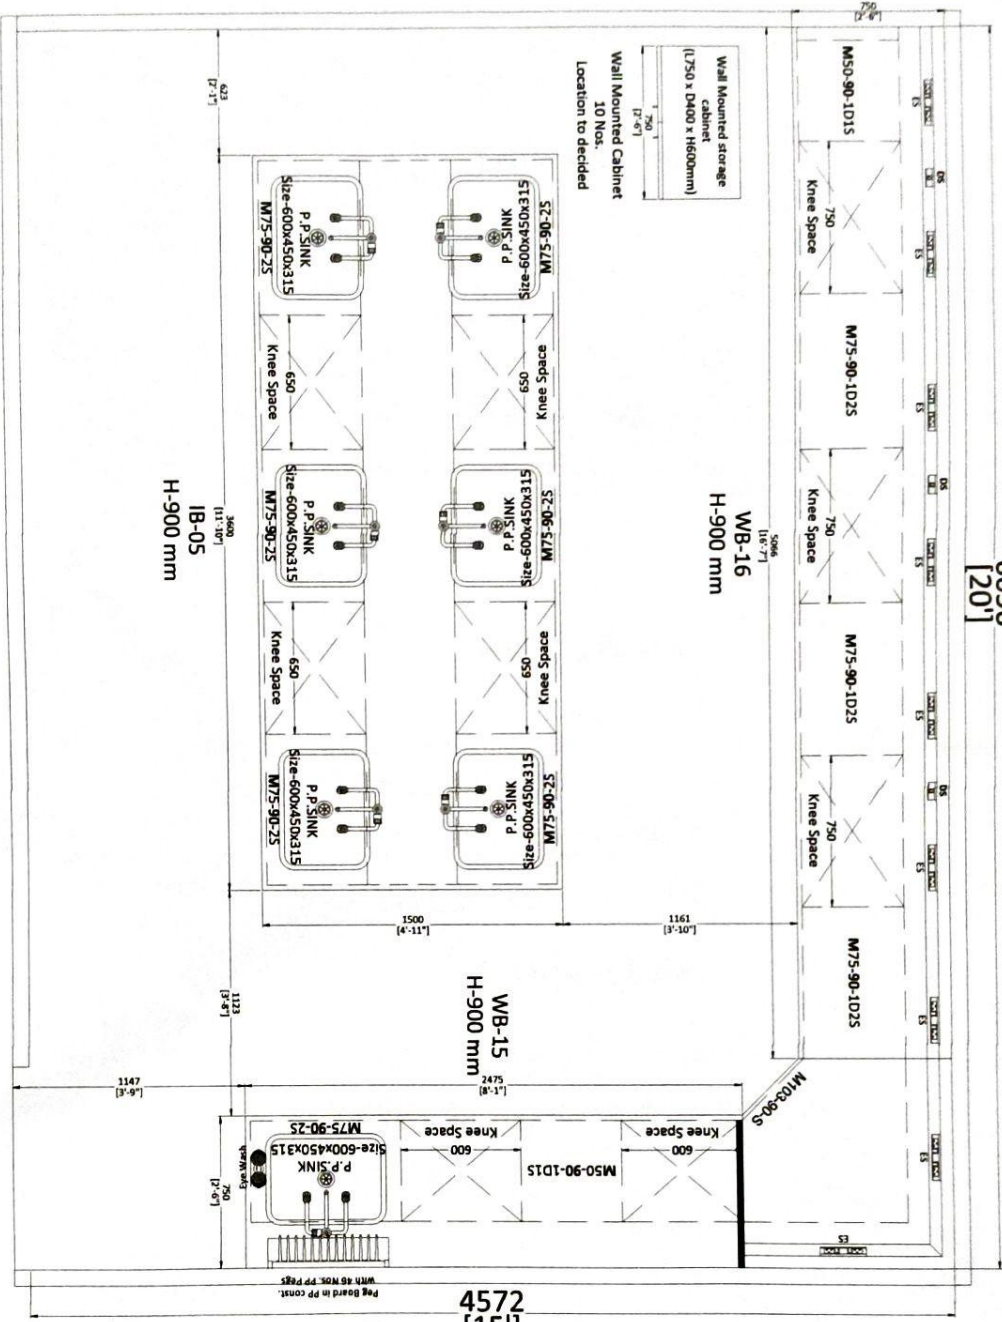

DEPT. OF MEDICAL LABORATORY TECHNOLOGY

Talla bapin reddy
Talla bapin reddy

Citizen Industries

DESCRIPTION: RENEWED LAYOUT OF LABORATORY WORKSTATIONS IN PLINTH MOUNTED DESIGN & PLANT PRODS

Client: Nagaon University - Assam

DATE: 20.06.2020

SHEET NO. 01 OF 02

REV. NO. R2

LEGEND:

- WB: Wall Bench
- IB: Island Bench
- ES: Electrical Socket
- ER: Electrical Rackway
- M75-75/90-5: 750mm Module With Two Shutters
- M60-75/90-05: 500mm Module With One Drawer & One Shutter
- M35-75/90-05: 250mm Module With One Drawer & One Shutter
- M75-75/90-05: 250mm Module With One Drawer & One Shutter
- DSOR: Electrical Rackway

Note:

- All Dimensions are in "mm"
- Plinth Mounted System
- Flush Type Handle
- Single piece molded Big PP sink (SIZE: L600mmxW450mmxD315mm)
- Worktop in 18 ±1 mm thick Black Granite Construction
- Kindly note that all the 3D views shown here are for your reference only.

NOMENCLATURE:


- Plinth Storage Module
- Height Of Workbench (in cms.)
- Width of Module (in cms.)
- Drawer
- Shutter

CABINET DETAILS


Registrar U/c
Nagaon University
Nagaon (Assam)
Pin-782001

Registrar i/c
Nagaon University
Nagaon (Assam)
Pin-782001

PHYSICS LAB - 02

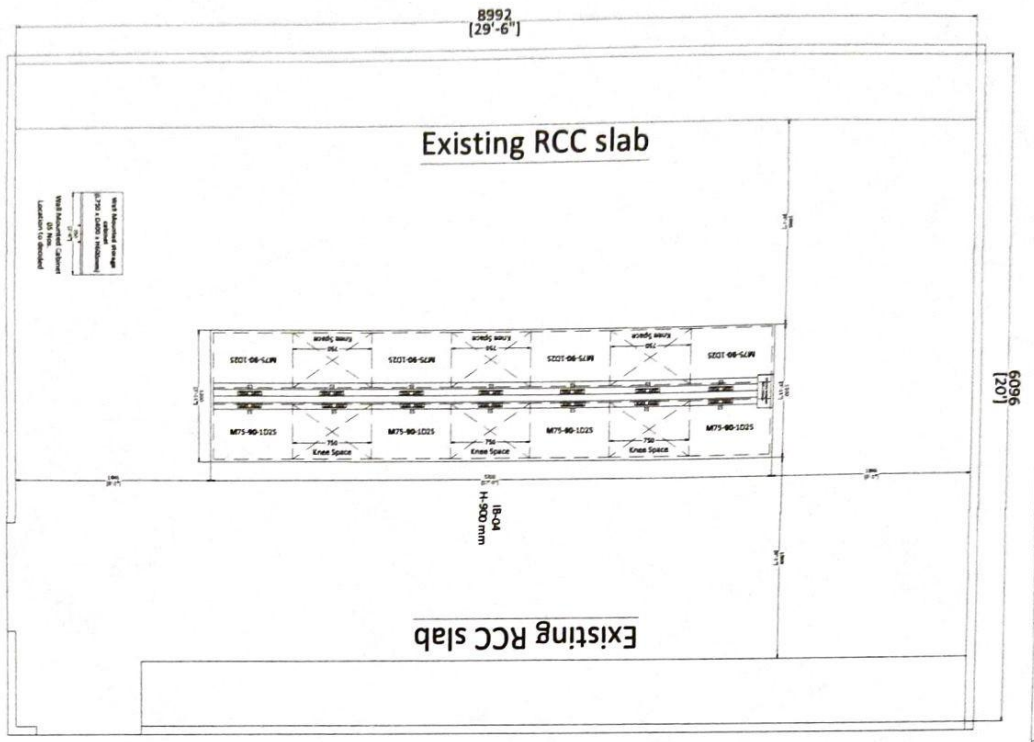


PHYSICS LAB - 01

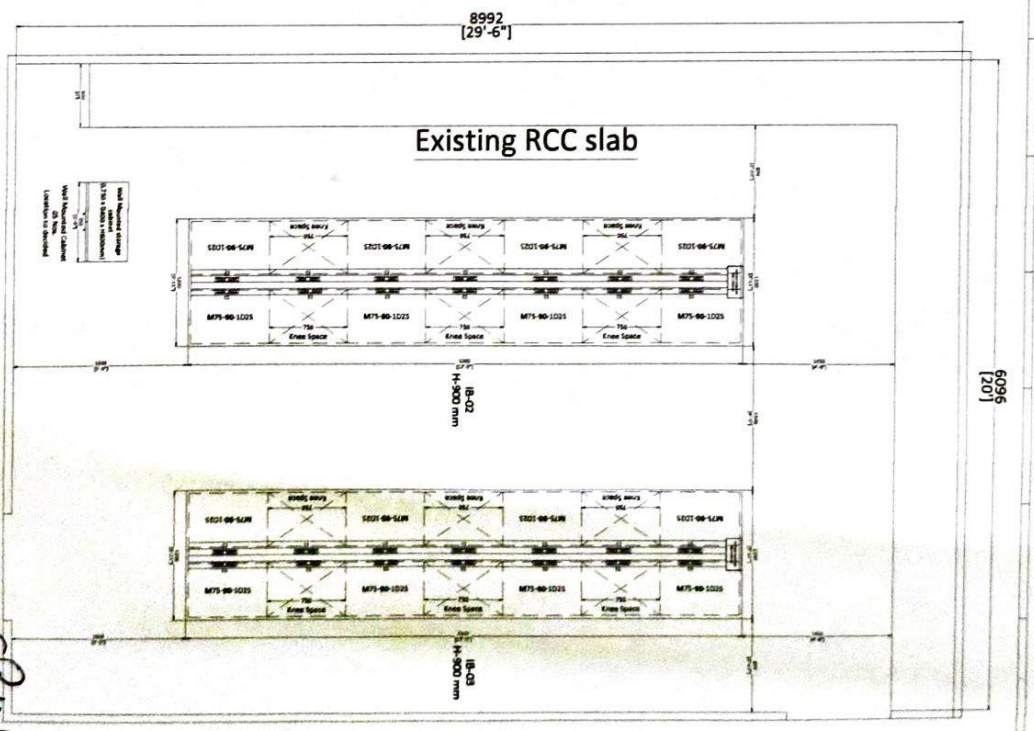

Note:
• All Dimensions are in "mm"
• Plinth Mounted System
• Flush Type Handle
• Single piece molded Big PP sink (SIZE: L600mmxW450mmxD315mm)
• Worktop in 18 ± 1 mm thick Black Granite Construction
• Kindly note that all the 3D views shown here are for your reference only.

NOMENCLATURE:
Plinth Height of Storage Module (in cms.)
M50-90-DS
Width of Module (in cms.)
Drawer Shutter

CABINET DETAILS



Citizen Industries
RENDER LAYOUT OF LABORATORY WORKSTATIONS IN PLINTH MOUNTED DESIGN & PLUMB WORKS

DATE: 28/08/2020	DATE: 28/08/2020	DATE: 28/08/2020	DATE: 28/08/2020
DWG. NO. 30413	DWG. NO. 30413	DWG. NO. 30413	DWG. NO. 30413
SCALE: N.T.S.	SCALE: N.T.S.	SCALE: N.T.S.	SCALE: N.T.S.
SHEET NO. 01 OF 02	SHEET NO. 01 OF 02	SHEET NO. 01 OF 02	SHEET NO. 01 OF 02
REV. NO. 02	REV. NO. 02	REV. NO. 02	REV. NO. 02

Follow with material order